

MULTI DISPLAY ENDOSCOPY CAMERA
FULL HD 1080P



HD 1080P



NO DELAY



MONITOR&TV



COMPUTER



PHONE&TABLET



ADJUSTABLE



POWER BANK



PORTABLE



Medical, Aesthetics & Laboratory Supplier
PT. Wickland Medika Imantara

Jl. Palem Sememi Raya No 12 - 12A Kel. Sememi,
Kec. Benowo Surabaya 60198 | 031-33100412

1080P HDMI

HD 1080P/60FPS REALTIME IMAGE
HDMI/DVI(ADAPTOR) OUTPUT

 Wickland



LOW POWER
MORE THAN 5 HOURS WITH
A 20000mAH POWER BANK



1080P USB

HD 1080P/30FPS NO POWER CORD
USB 2.0 OUTPUT 120MS DELAY
SUPPORT WINDOWS / MAC OS / LINUX



WINDOWS MAC OS LINUX



SUPPORT ANDROID PHONE&TABLET
WORLD FIRST



HD1080P LOW DELAY


HD 1080P/30FPS 120ms DELAY
SUPPORT IMAGE CAPTURE & VIDEO RECORD




- * HIGH-END ANDROID PHONE HELPS TO LOWER IMAGE DELAY.
- * CAN'T GUARANTEE COMPATIBILITY OF ALL ANDROID PHONE AS THERE ARE TOO MANY BRANDS AND VERSIONS.



HDMI 1080P OUTPUT

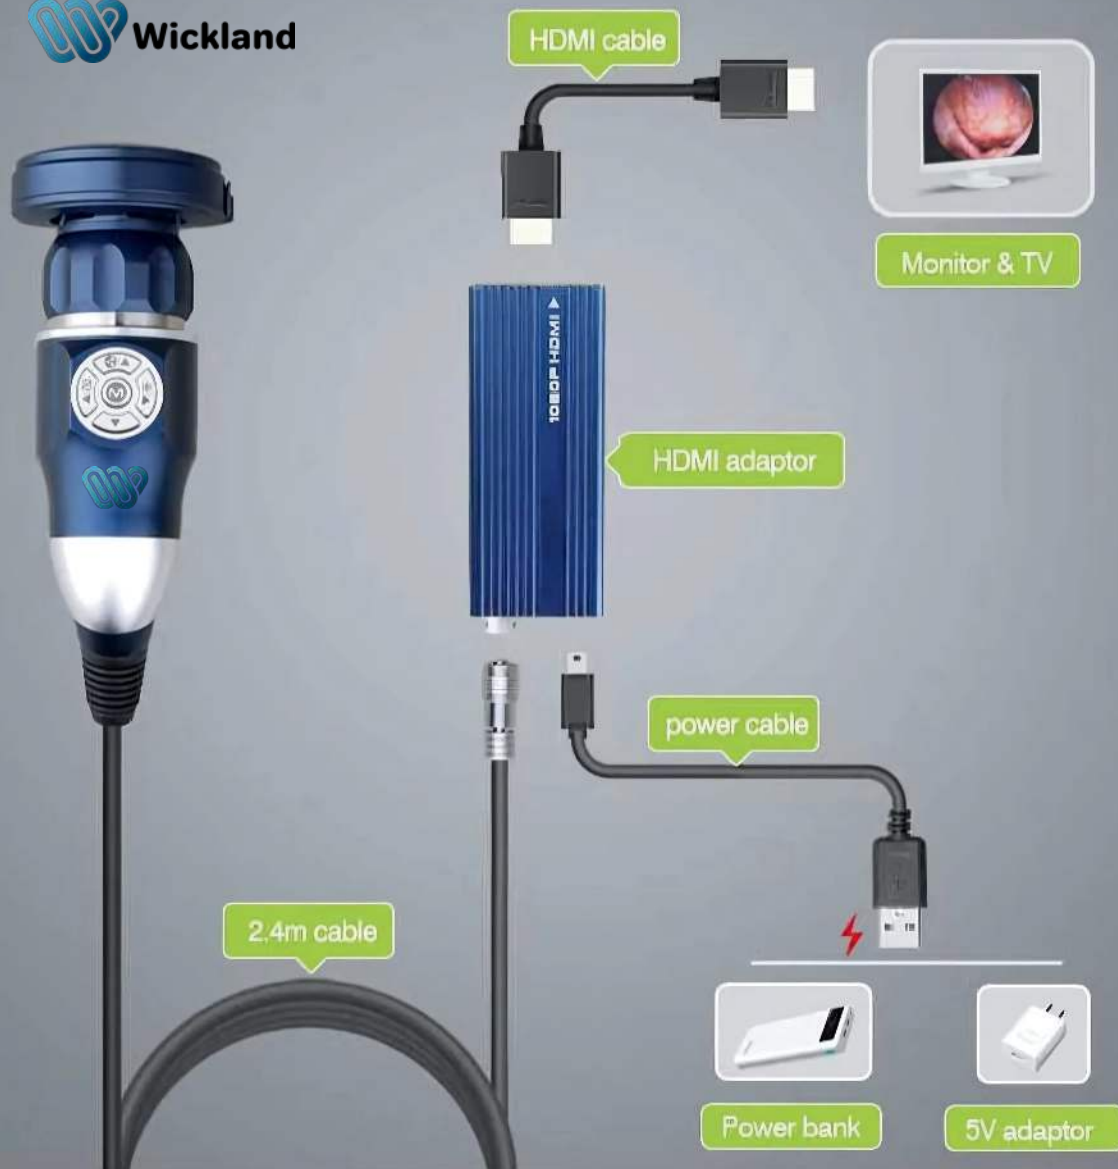

USB 1080P OUTPUT

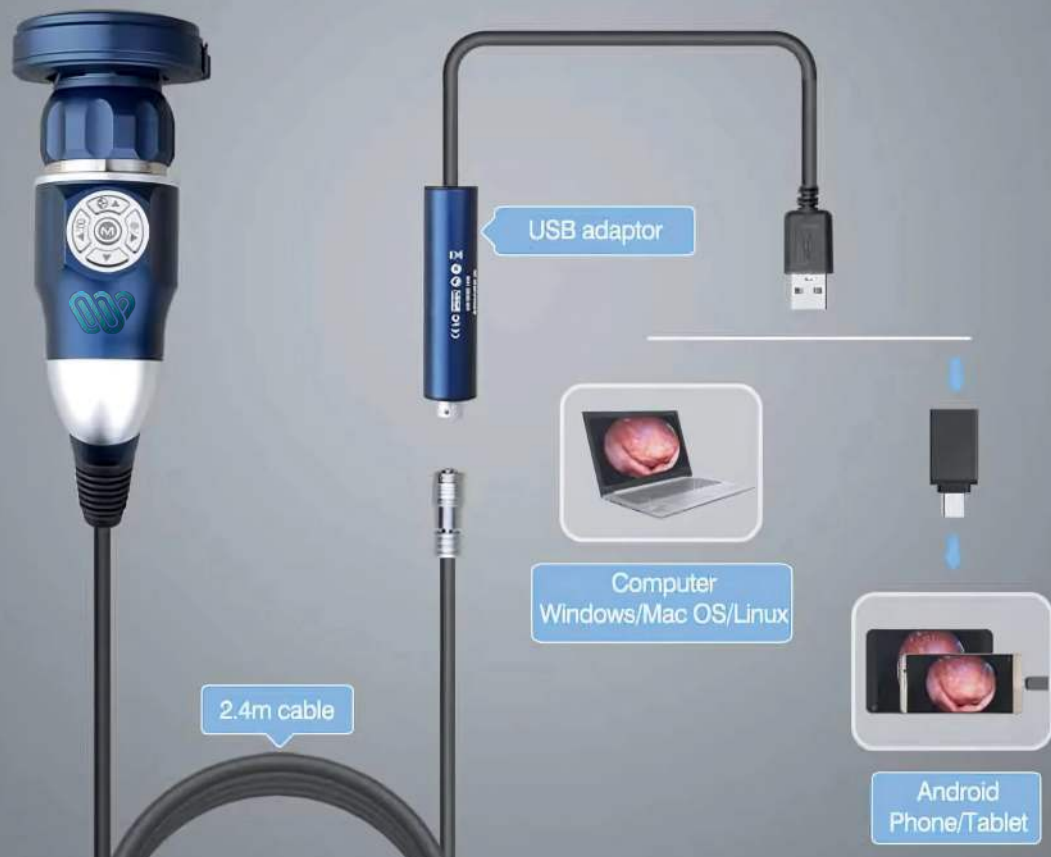

TECHNIQUE DATA

Camera Data	Sensor	1/2.8" Sony CMOS
	Pixels	2,100,000 Pixels
	Output Resolution	1920*1080/30FPS
	White Balance	Auto(Lock)
	Image Freeze	Yes
	Mode Switch	Yes
	SNR	>50dB
	Scanning Mode	Progressive Scanning
	Vertical Resolution	1200TVL
	Digital Noise Reduction	Auto
	Back Light Compensation	Auto
	Lens	F22mm
	Cable Length	2.4 meters
	Dimension	106mm(L)*36mm(D)
	Net Weight	154g
HDMI Data	Output Interface	HDMI 1.4 (DVI)
	Output Resolution	1920*1080/60FPS
	Power Supply	DC5V
	Dimension	78mm*32mm*18mm
	Net Weight	45g
USB Data	Output Interface	USB2.0
	Output Resolution	1920*1080/30FPS
	Power Supply	No
	Driver	No
	Computer System	Windows/Mac OS/Linux
	Mobile Phone System	Android 7.0 or later
	Dimension	60mm(L)*15mm(D)
	Net Weight	13g



OSD MENU

- * Support On-screen display menu. All key characters include shutter/brightness/color/backlight/sharpness etc can be adjusted.
- * 3 short-cut key to adjust white balance, freeze image and switch modes.



SONY IMX
1/2.8" CMOS



IMAGE PROSSOR
FROM KOREA



FITS ALL
RIGID ENDOSCOPE



ELECTROMAGNETIC
SHIELDING



MANUAL
FOCUS



IP8X
WATERPROOF



DC5V SUPPORT POWERBANK

HDMI ADAPTOR CAN BE POWERED BY POWER BANK
USB ADAPTOR IS POWERED DIRECTLY BY COMPUTER/MOBILE/TABLET

154g
CAMERA

45g
HDMI BOX

13g
USB BOX

