



wicklandmedika.com



PT. Wickland Medika Imantara

Medical, Aesthetics & Laboratory Supplier

Jl. Palem Sememi Raya No 12 – 12A Kel. Sememi,
Kec. Benowo Surabaya 60198 | 031-33100412



Manufacturer with EMC Testing Lab

Professional Manufacturer in Medical Camera System Field

Wireless Endoscope Camera System DJSXJ-1B-WMI

1080 FHD+



Portable



Wireless



Waterproof



Multi-display

Usage


Clinic Inspection

Ward Inspection

Mobile Emergency

Teaching

Connection

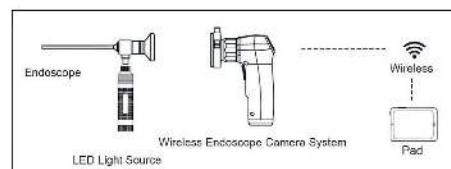

Specification

Image Sensor	1/2.9"Sony IMX322 CMOS Sensor
Unit Cell Size	2.8 um x 2.8 um
Effective Pixels	1920 (H) X 1080 (V)
Resolution	800 TVL
Photometry	Auto
Exposure	Auto
S/N	>54dB
Image Gamma	Auto
Shutter	Auto range 1/50 - 1/4000
Transmission	Wifi RTSP
Lens Mount	C-Mount
Scanning Mode	Progressive
Illumination Ref.	3000K-8000K
Min.Sensitivity	20Lx F1.4
Waterproof	Waterproof Design
App System	iOS, Android
Storage Mode	Pad storage or option 64G Highspeed TF card to build in
Data Read	USB or App Online Read
White Balance	Manual
Language	Chinese, English
Handle Button	Picture, Video, White balance
Battery	Built-in rechargeable and replaceable Li-ion Battery DC3.7V 3400mAh
Working Time	4 hours on continuous use
Power Saving Design	Automatic shutdown after 10 mins static
Charge Requirement	DC5V 2A
Working Temperature	0°C ~ +40°C
Power Supply	AC100~240V 50/60 Hz
Weight	200g

Feature

- Built-in SD Card, with picture and video function
- High image quality, Resolution 800TVL, S/N:54dB
- 1/2.9"Sony IMX322 CMOS Sensor
- Transmission: Wifi RTSP
- Built-in rechargeable and replaceable Li-ion Battery
- 4 hours on continuous use
- Portable, Mobile

4K Wireless Endoscope Camera System

SMART 4K



Portable



Wireless



Waterproof



Multi-display

■ Usage

Clinic Inspection

Ward Inspection

Mobile Emergency

Teaching

■ Connection



■ Specification

Image Sensor	1/1.8" Sony IMX678 CMOS Sensor
Unit Cell Size	2.0 μ m x 2.0 μ m
Effective Pixels	3840 (H) X 2160 (V)
Resolution	1800 TVL
Photometry	Auto
Exposure	Auto
S/N	>54dB
Image Gamma	Provide 15 gamma curve options
Shutter	Auto range 1/50 - 1/4000
Transmission	Wifi, private transmission agreement
Lens Mount	C-Mount
Scanning Mode	Progressive
Illumination Ref.	3000K-8000K
Min. Sensitivity	20Lx F1.4
Waterproof	Waterproof Design
App System	iOS, Android
Storage Mode	Pad storage or option 64G Highspeed TF card to build in
Data Read	USB or App Online Read
White Balance	Manual
Language	Chinese, English
Handle Button	Picture, Video, White balance
Battery	Built-in rechargeable and replaceable Li-ion Battery DC3.7V 3400mAh
Working Time	3.5 hours on continuous use
Power Saving Design	Automatic shutdown after 10 mins static
Charge Requirement	DC9V 2A, DC5V 3A
Working Temperature	0°C ~ +40°C
Power Supply	AC100~240V 50/60 Hz
Weight	380g

■ Feature

- Built-in Highspeed eMMC, with picture and video function
- High image quality, Resolution 1800TVL, S/N:54dB
- 1/1.8"Sony IMX678 CMOS Sensor
- Transmission:Based on WiFi Ultra Low Delay Private Agreement
- Built-in rechargeable and replaceable Li-ion Battery
- 3.5 hours on continuous use
- Portable , Mobile

Portable Light Source

LEDQM-01




Portable



Waterproof



100 level light adjustment



Natural light
color temperature



4 hours on
continuous use

■ Specification

Power	3W
Color Temperature	5700K, natural light color temperature
Display Index	Ra=90
Illumination	300000LUX
Lamp Life	≥ 20000 hours
Battery	Built-in chargeable li-ion battery DV3.7V 3400mAh
Working hours	4 hours on continuous use
Power Supply	AC100-240V 50/60 Hz
Weight	120g